

Analysis of SWAT Simulated Soil Moisture with the MODIS Land Surface Temperature and Vegetation Index for Soyanggang Dam Watershed of South Korea

Geun Ae PARK / Alan F. HAMLET

Department of Civil and Environmental Engineering, University of Washington, USA

Woo Yong HONG / Ji Wan LEE / Hyung Jin SHIN / Cheol Hee Jang /

Department of Civil & Environmental System Eng., Konkuk University, South Korea

Seong Joon KIM

Professor, Dept. of Civil & Environmental System Eng., Konkuk University, South Korea


Contents

- I. Introduction
- II. Process of This Study
- III. Material and Method
 - A. Study Watershed
 - B. SWAT Model Description
 - C. Input Datasets for Calibration and Validation of the SWAT Model
 - D. MODIS NDVI & LST
- IV. Result and Discussion
 - A. Model Calibration and Validation for the Streamflow
 - B. Model Calibration and Validation for the Soil Moisture
 - C. The Correlation Analysis
 - D. The Multiple Regression Analysis
- V. Summary and Conclusion

Introduction

- ❖ **Soil moisture** is an important hydrologic component of water balance, and highly dependent on the **surface temperature** and **vegetation vitality** under the spatial land cover condition.
- ❖ Recently, researches to evaluate the watershed scale soil moisture have been attempted by using **satellite products** to overcome the limited information of field scale soil moisture. The monitoring and modelling of land surface and/or vegetation processes by using satellite images viz. NOAA AVHRR and **Terra and Aqua MODIS** is now popular.
- ❖ MODIS NDVI and LST can be a useful indicator to analyze the soil moisture during the active growing of crop or plant, and to determine the soil moisture condition for drought monitoring (Narasimhan et al., 2005).
- ❖ This study is to identify how much MODIS NDVI and LST products can explain soil moisture of forest area by using **SWAT simulated soil moisture** results.

Process of This Study

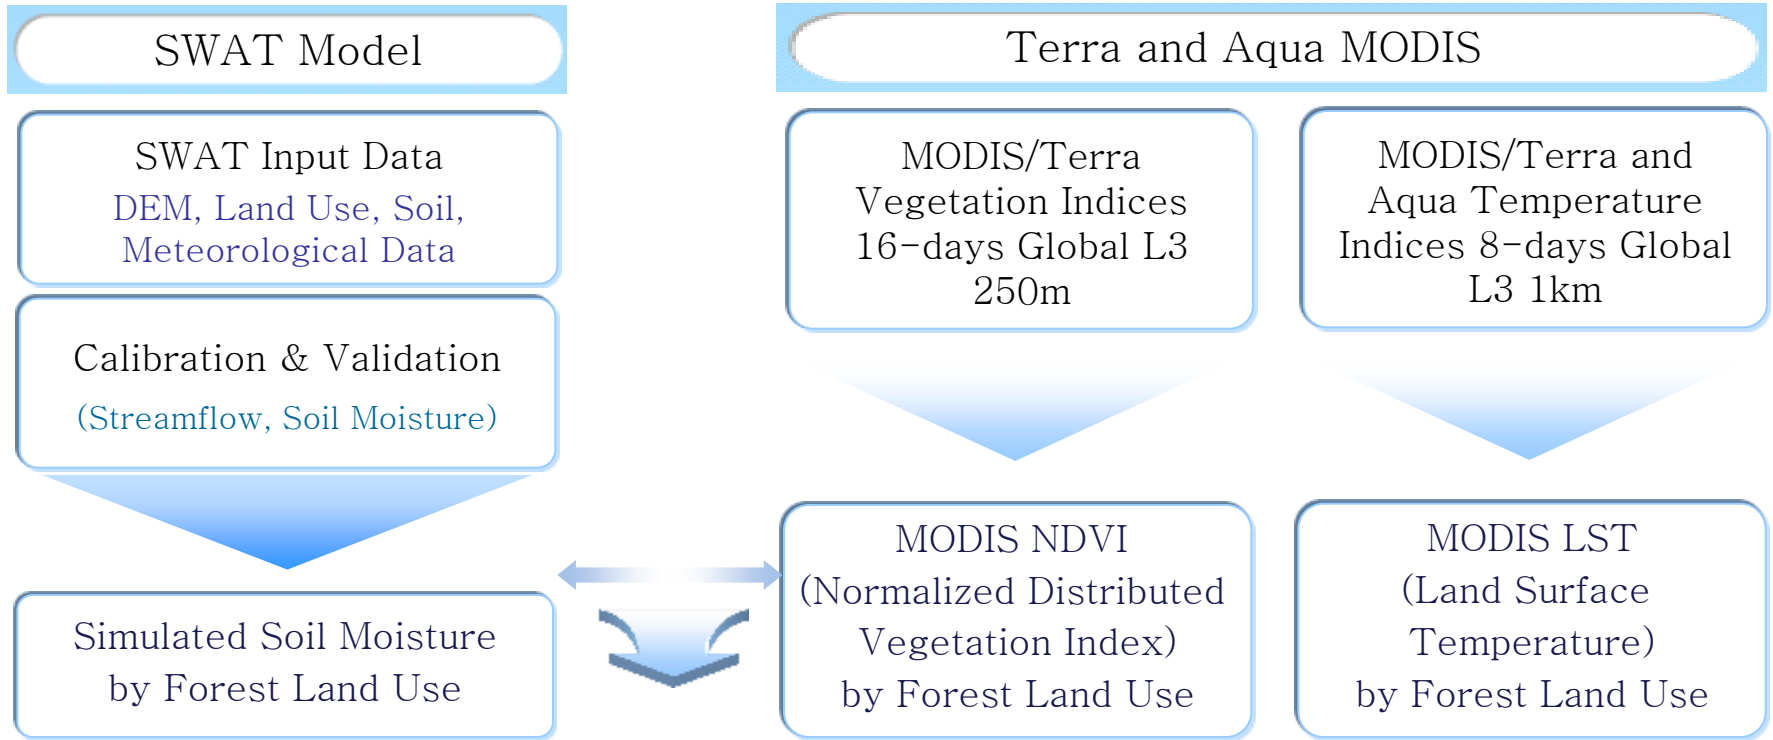


Correlation Analysis and Multiple Regression Analysis

between SM and NDVI, LST

Material and Method

❖ Study Watershed

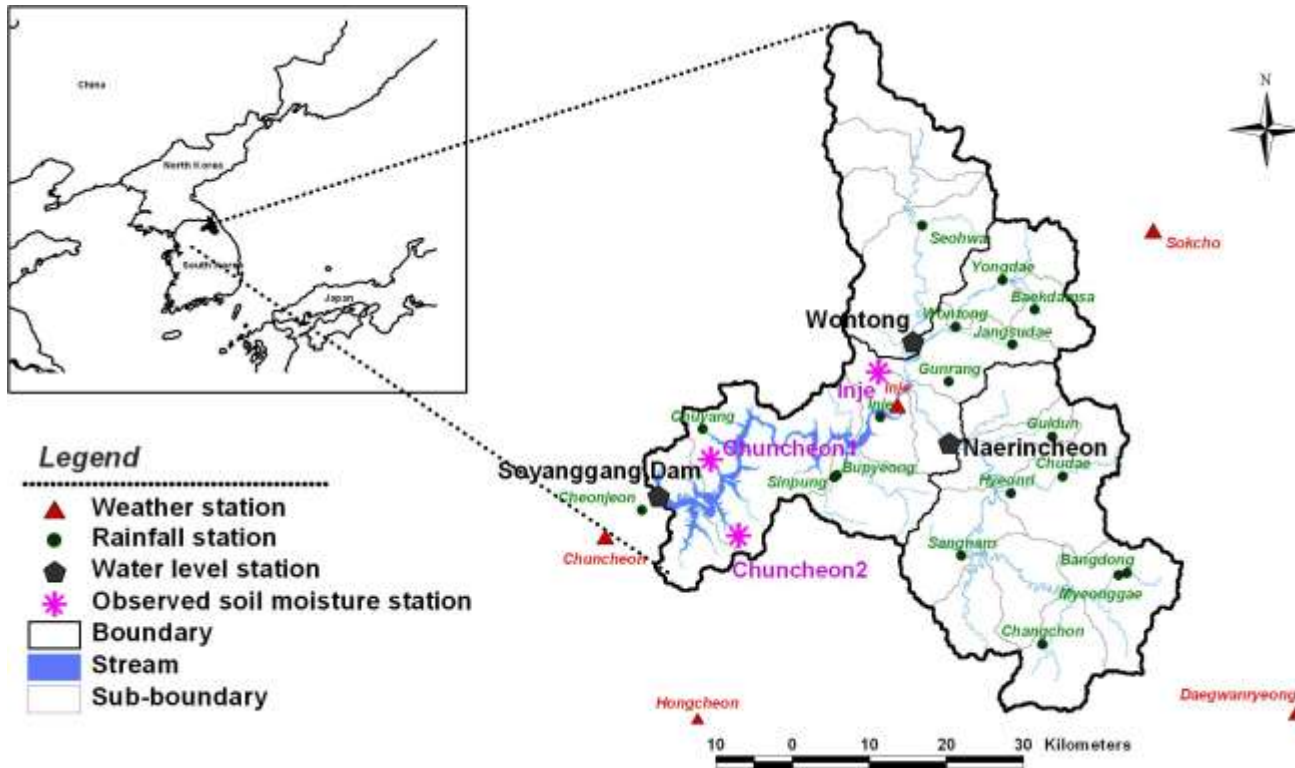

- ◆ Study area: 2,694.4 km² forest-dominant (93 %) watershed
- ◆ The watershed was subdivided into 3 sub-watersheds, which the division locations are Wontong, Naerincheon, and SoyanggangDam water level gauging stations.
- ◆ The annual average precipitation is 1,359.5 mm, and the mean temperature is 9.4 °C over the last 30 years (1977 - 2006).
- ◆ In the watershed, three measured soil moisture stations(Inje, Chuncheon1, Chuncheon2) was located.

Material and Method

❖ SWAT Model Description

- ❑ Soil and Water Assessment Tool (SWAT, developed by Arnold et al. in 1998)

$$SW_t = SW_0 + \sum_{i=1}^t (R_{day} - Q_{surf} - E_a - W_{seep} - Q_{gw})$$

SW_t = Final soil water content (mm)

SW_0 = Initial soil water content on day i (mm)

R_{day} = Amount of precipitation on day i (mm)


Q_{surf} = Amount of surface runoff on day i (mm)

E_a = Amount of evapotranspiration on day i (mm)

W_{seep} = Amount of water entering the vadose zone from the soil profile on day i (mm)


Q_{gw} = Amount of return flow on day i (mm)

Soil & Water
Assessment Tool | **SWAT**

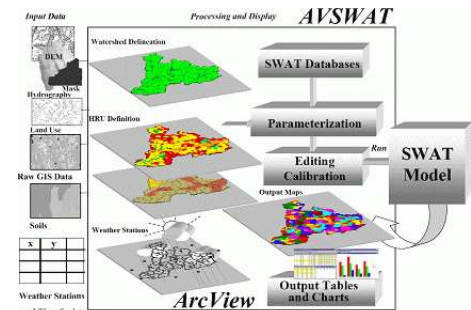


Material and Method

❖ *Input Datasets for Calibration and Validation of the SWAT Model*

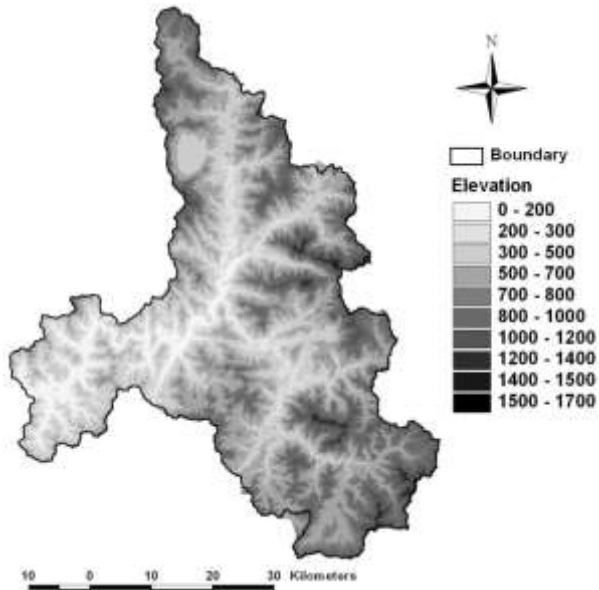


Elevation

- range : 155 - 1,639 m
- average : 643.9 m

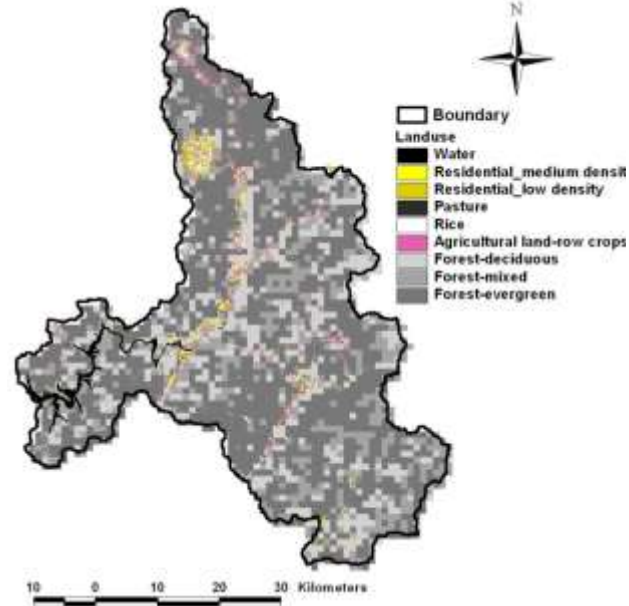

Land use

- the 9 categories
- prepared by 2000 Landsat TM (Thematic Mapper) supervised classification with NOAA NDVI

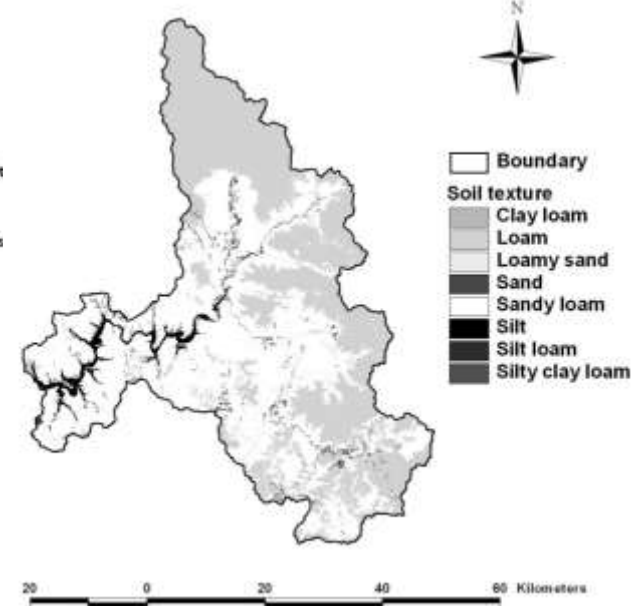


Soil

- loam (52.4 %), and loamy sand (42.4 %)


Material and Method

❖ *Input Datasets for Calibration and Validation of the SWAT Model*

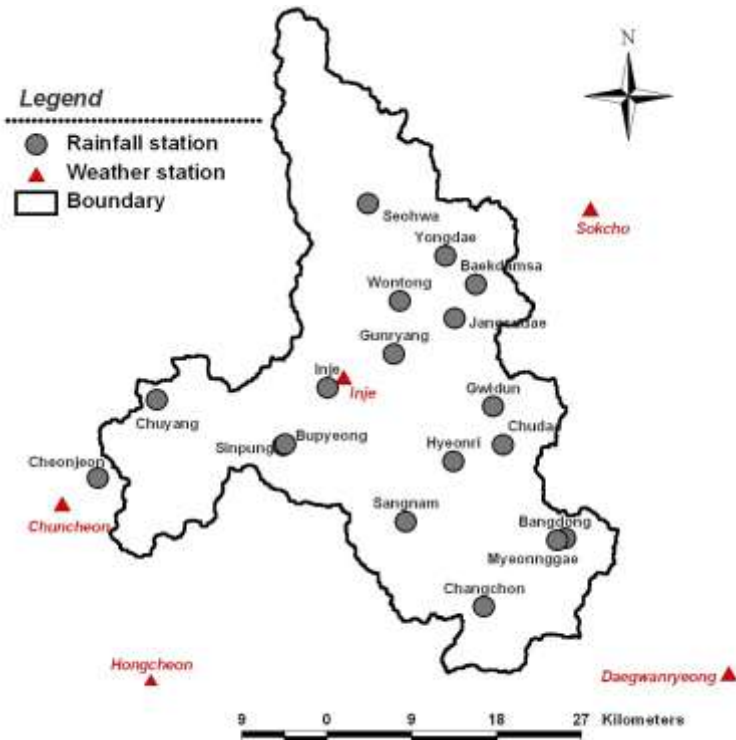

Meteorological data

- Daily weather data (temperature, relative humidity, wind speed, sunshine hour) were collected from five stations (1998-2009)
- Daily rainfall data were collected from eighteen stations (1998-2009)

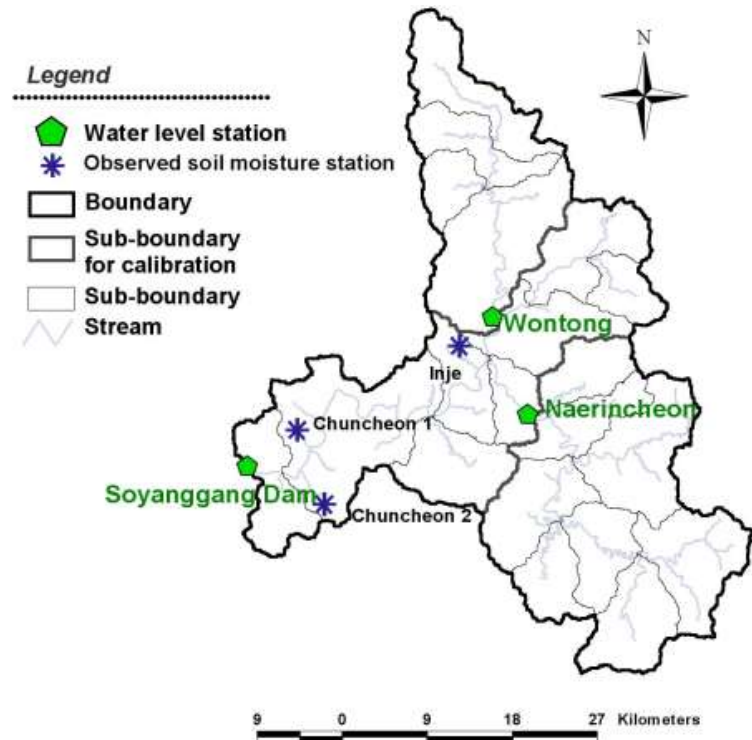


Streamflow and soil moisture data

- Daily streamflow data at the three water level stations were obtained (1998-2009) from the Ministry of Construction and Transportation.
- Daily soil moisture data were obtained from Agricultural Information System (2003-2008)


Material and Method

❖ MODIS NDVI for the Correlation Analysis

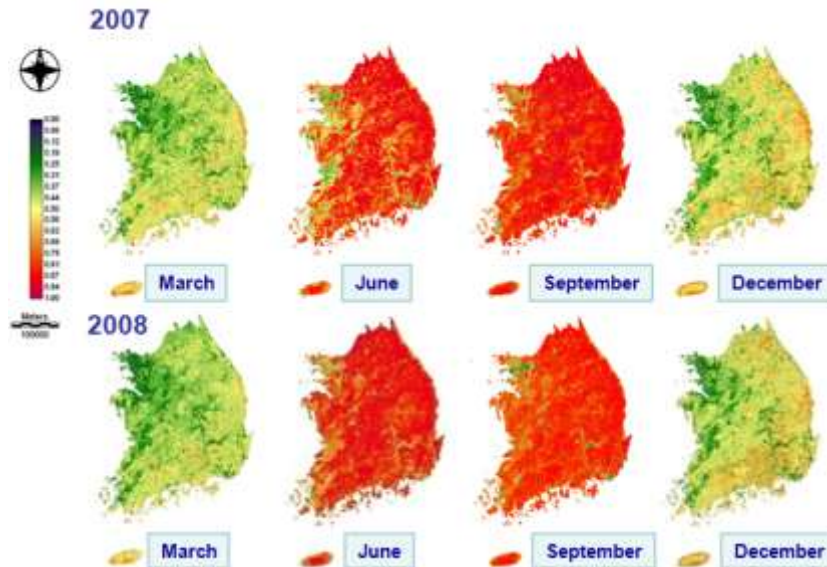


MODIS NDVI

- Spatial resolution: 250 m
- Temporal resolution: 16 days
- Wave length:
 - Band1(0.62-0.67 μm)
 - Band2(0.84-0.88 μm)
- NDVI:
 - $(\text{Band2} - \text{Band1}) / (\text{Band2} + \text{Band1})$
- The value of NDVI: 0.27-0.90
- NDVI of June, July and August is mainly high.

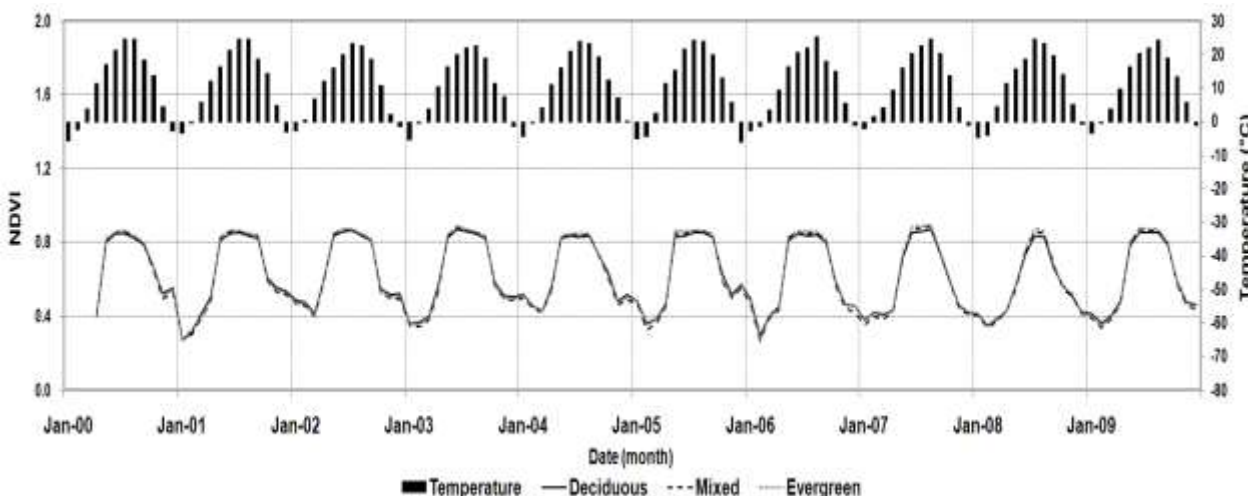


Material and Method

❖ MODIS LST for the Correlation Analysis

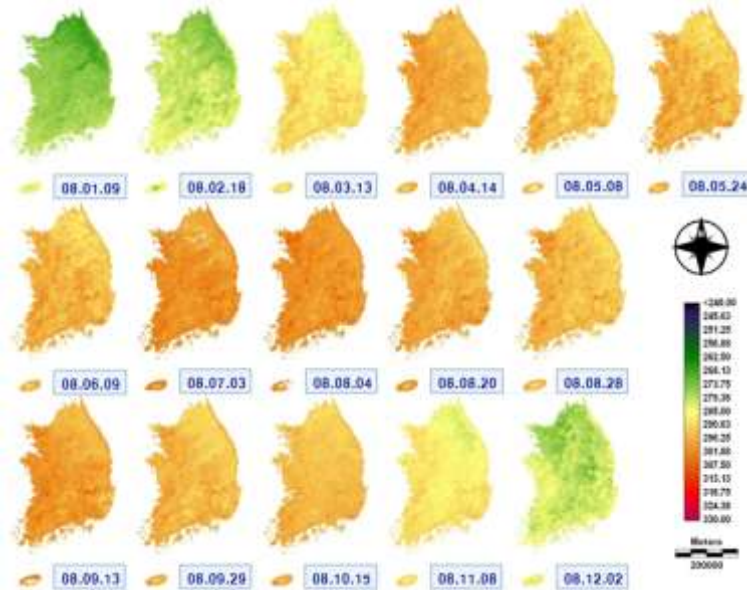

MODIS LST

- Spatial resolution: 1 km
- Temporal resolution: 8 days
- Wave length:
 - Band31(10.78-11.28 μm)
 - Band32(11.77-12.27 μm)
- Unit: Kelvin
- The value of LST: 252-300
- LST of May, June, July and August is mainly high.

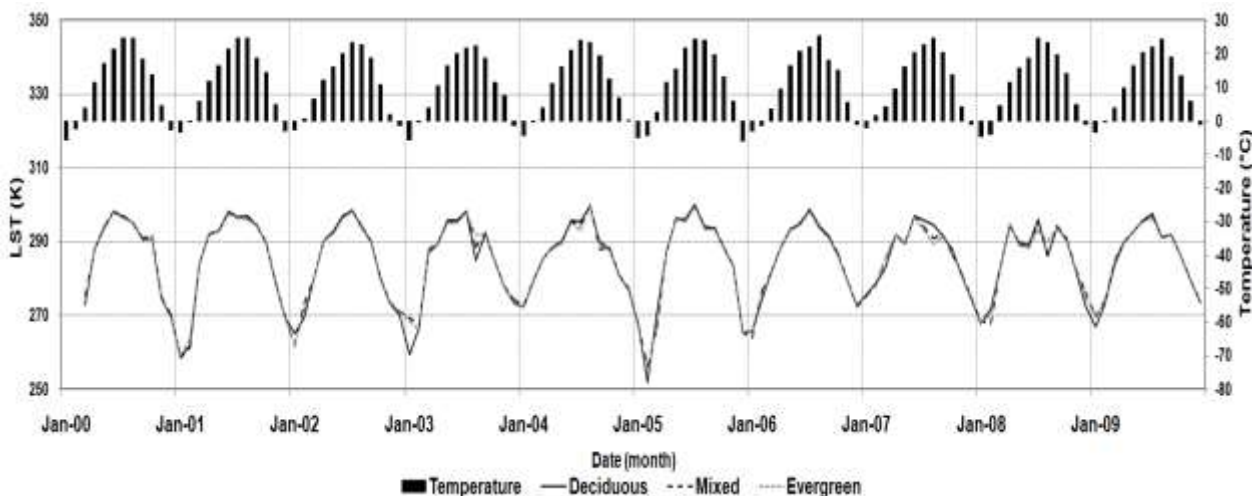

Result and Discussion

Model Calibration and Validation for the Streamflow

Result and Discussion

❖ The Descriptions


- SWAT model setup process
 - ✓ No. of Subbasin : 20
 - ✓ No. of HRU : 348

- The calibrated model parameters at 3 sub-watersheds


Parameter	Description	Calibration Range	Wontong Optimal value	Naerincheon Optimal value	Soyanggang Dam Optimal value
CN2	Curve number adjustment ratio	± 20%	0	10	10
ESCO	Soil evaporation compensation	0.01 - 1	0.5	0.3	0.02
SOL_AWC	Available water capacity	± 20%	10	- 10	5
SFTMP	Snowfall temperature (°C)	- 5 - 5	1	1	1
SMTMP	Snow melt base temperature (°C)	- 5 - 5	0.5	0.5	0.5
SMFMX	Maximum snow melt factor (mm H2O/°C-day)	0 - 10	4.5	4.5	4.5
SMFMN	Minimum snow melt factor (mm H2O/°C-day)	0 - 10	4.5	4.5	4.5
TIMP	Snow pack temperature lag factor	0 - 1	1	1	1
LAT_TTIME	Lateral flow travel time (days)	-	3	3	2
GW_DELAY	Groundwater delay time (days)	0 - 500	180	150	180
CH_K2	Effective hydraulic conductivity of main channel	0 - 150	70	20	20

Result and Discussion

❖ 1. Wontong

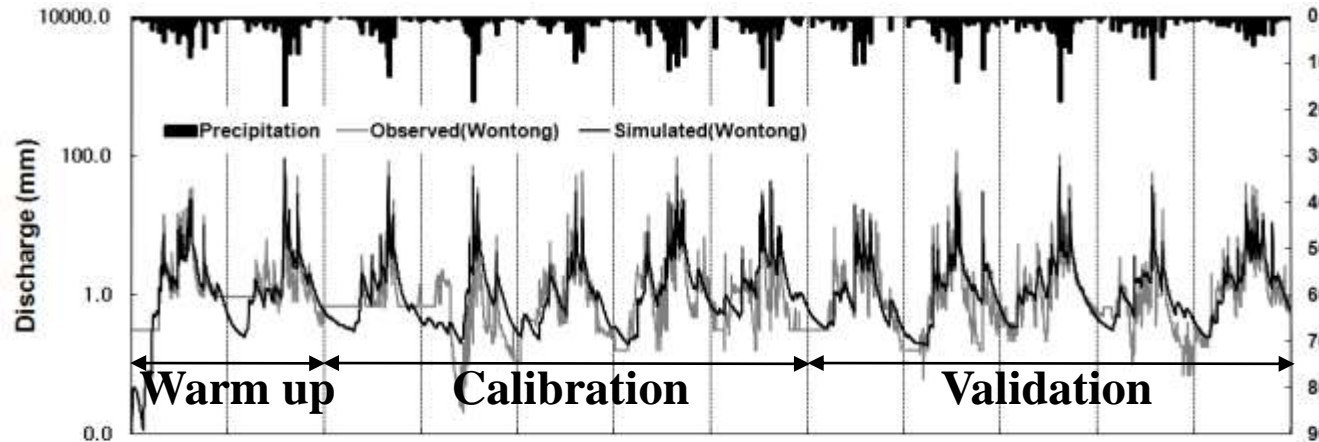


Year		R^2	RMSE (mm/day)	NSE
Calibration	2000	0.83	2.25	0.80
	2001	0.88	1.68	0.86
	2002	0.68	3.04	0.60
	2003	0.78	3.15	0.76
	2004	0.45	3.07	0.56
Validation	2005	0.56	1.48	0.62
	2006	0.88	2.40	0.74
	2007	0.72	2.80	0.70
	2008	0.74	2.27	0.73
	2009	0.79	2.78	0.73
Average		0.73	2.40	0.71

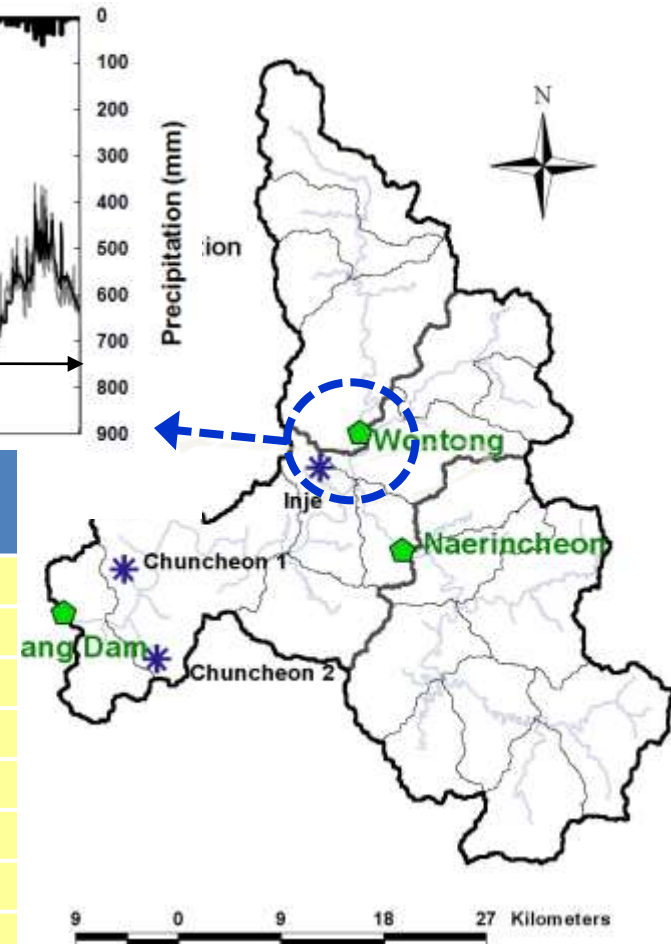


Result and Discussion

❖ 2. Naerincheon

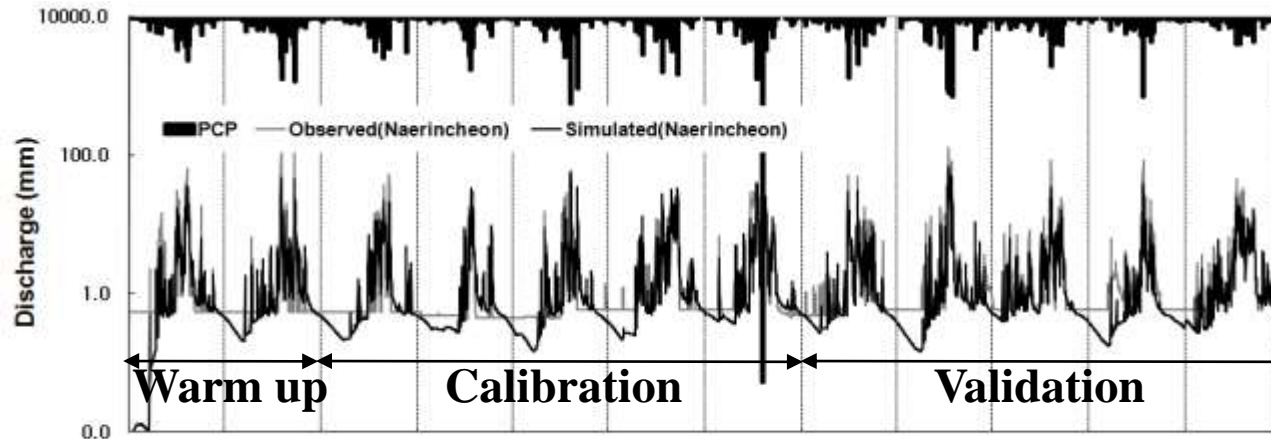


Year		R^2	RMSE (mm/day)	NSE
Calibration	2000	0.82	2.68	0.74
	2001	0.66	1.78	0.65
	2002	0.70	3.52	0.70
	2003	0.70	2.72	0.54
	2004	0.94	3.13	0.94
Validation	2005	0.64	2.91	0.63
	2006	0.84	3.44	0.78
	2007	0.82	2.08	0.75
	2008	0.78	3.53	0.72
	2009	0.79	2.75	0.69
Average		0.77	2.85	0.71

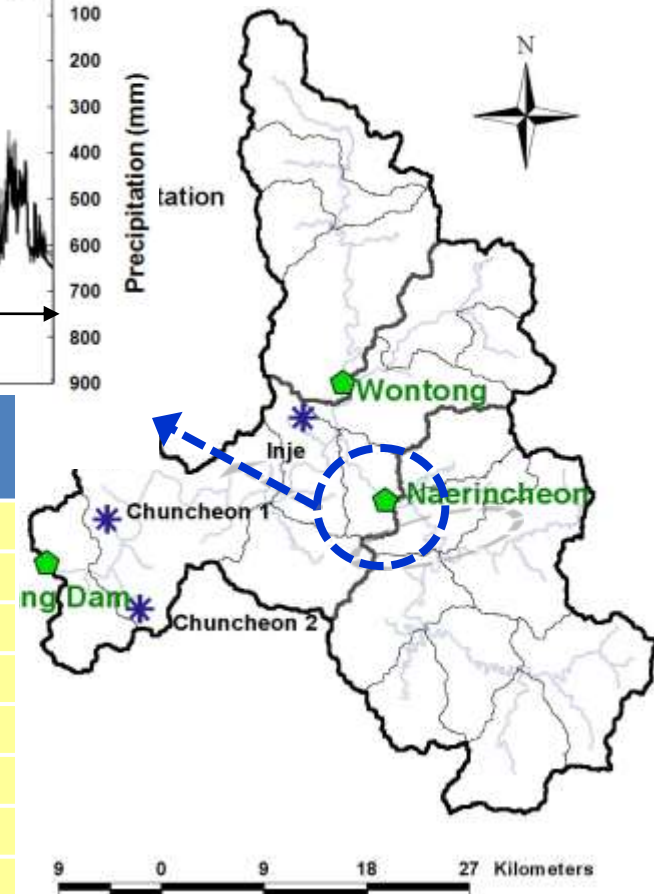

Result and Discussion

❖ 3. Soyanggang Dam


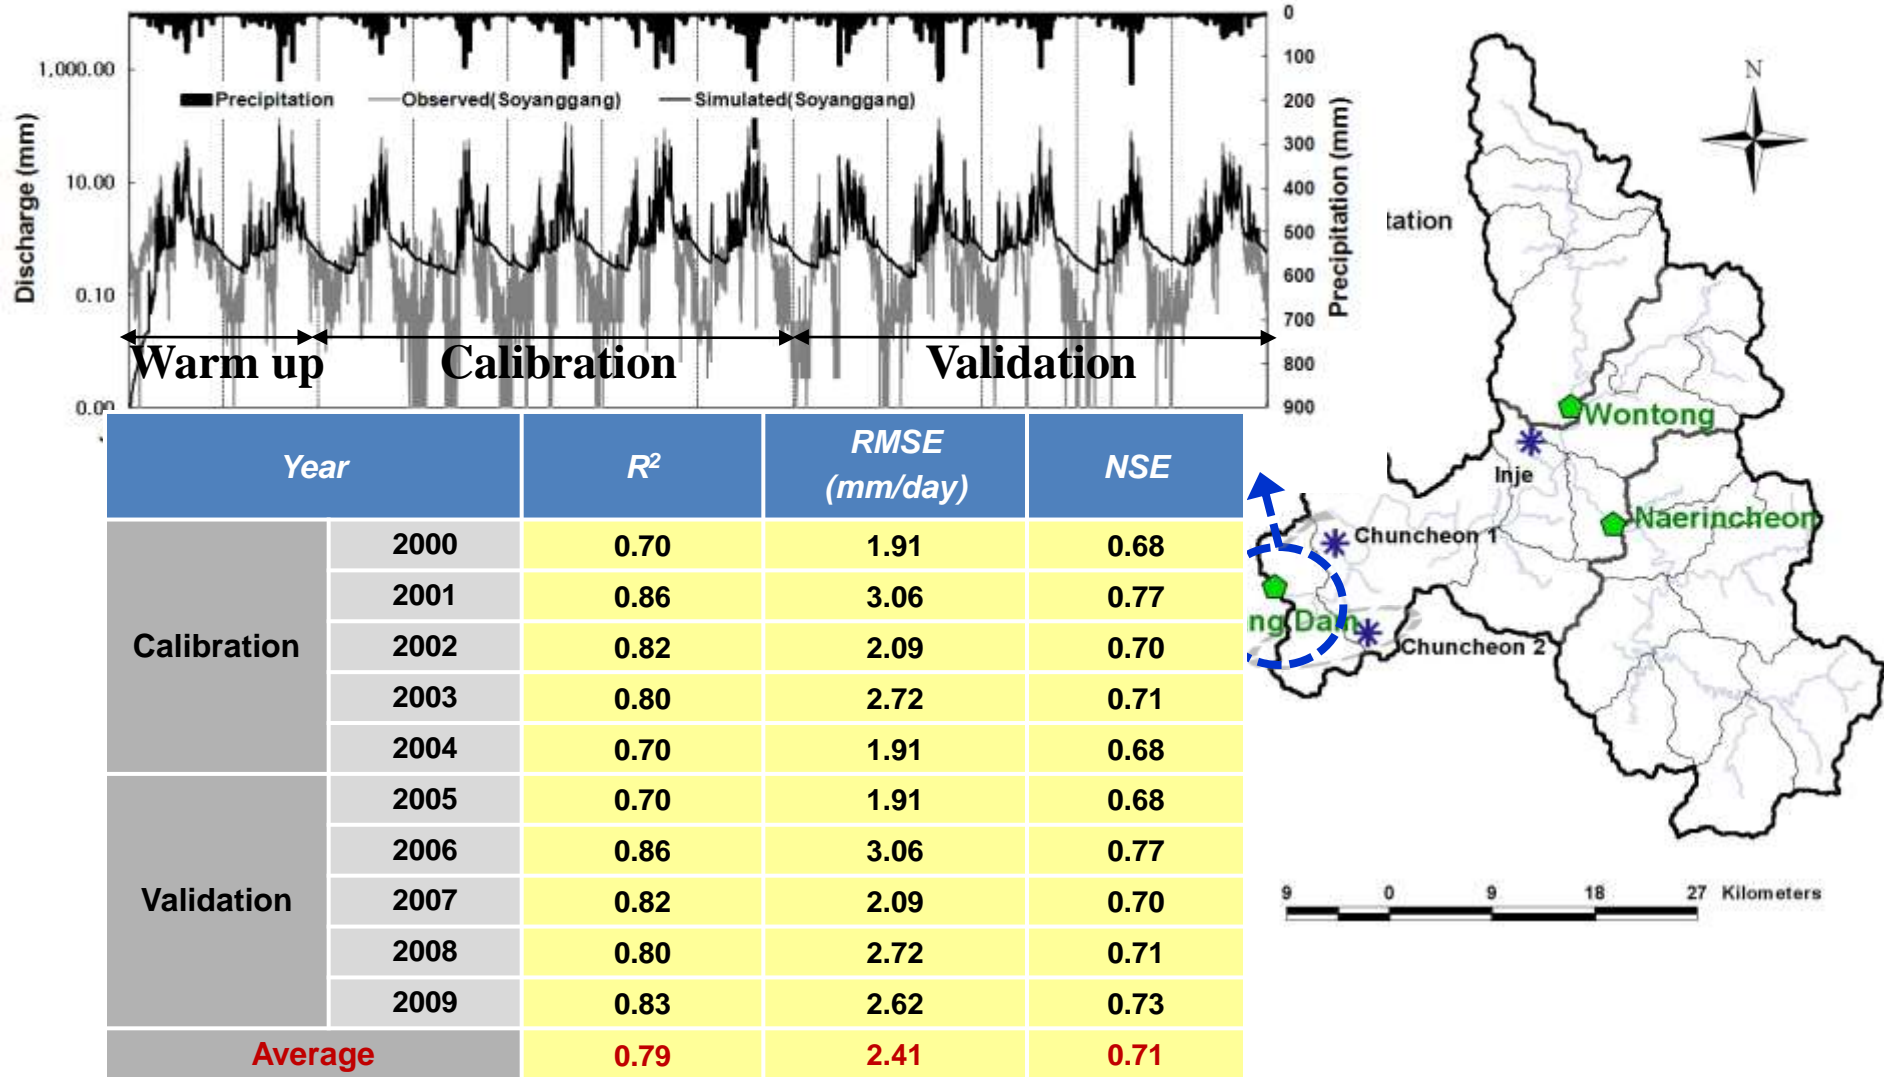


Result and Discussion

Model Calibration and Validation for the Soil Moisture

Result and Discussion



❖ 1. InJe

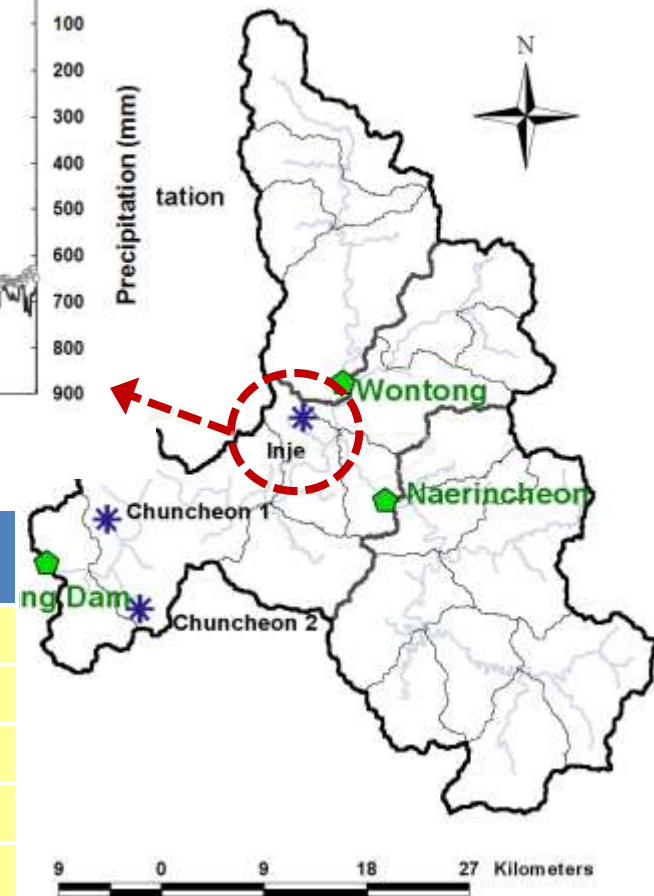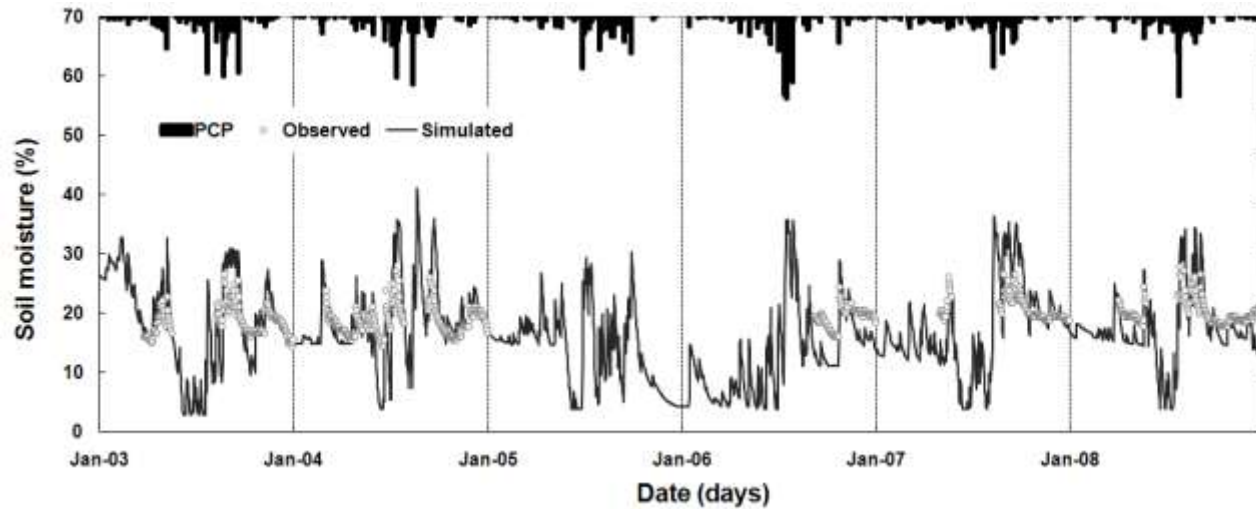

Year		Observed (%)	Simulated (%)	R^2
Calibration	2003	17.3	18.7	0.60
	2004	15.6	19.0	0.60
Validation	2005	-	-	-
	2006	14.4	12.8	0.72
	2007	19.8	17.5	0.60
	2008	18.9	17.4	0.64
Average		17.2	17.0	0.63

Result and Discussion



❖ 2. Chuncheon 1

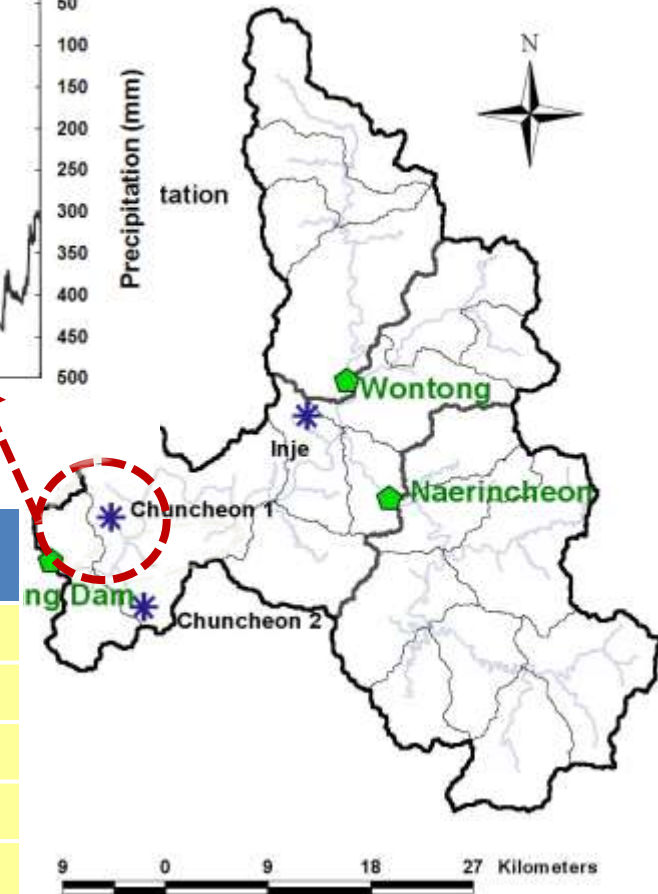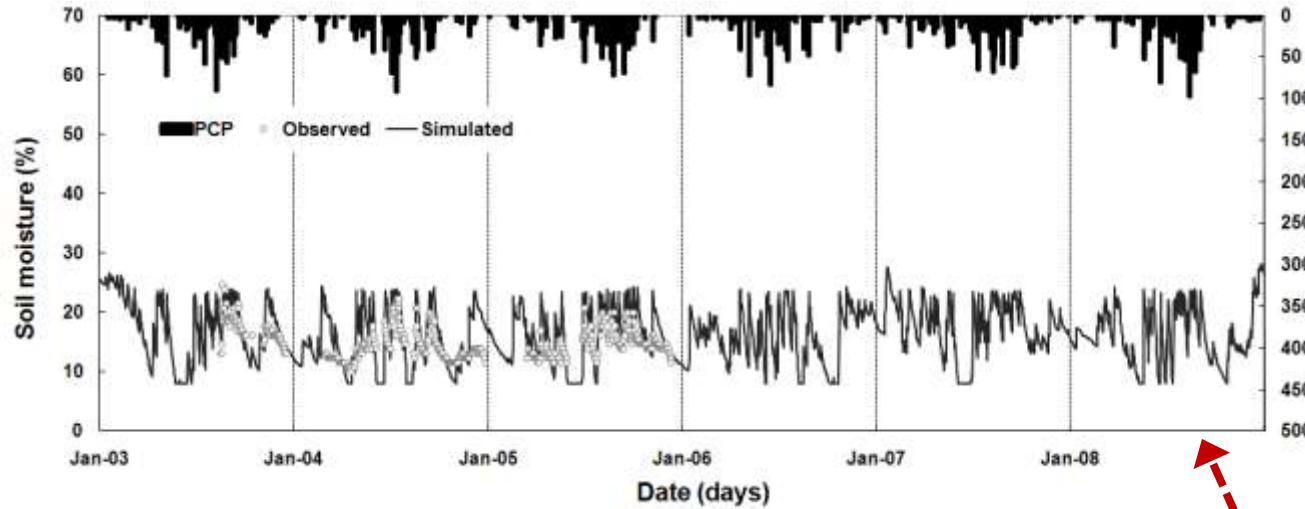

Year		Observed (%)	Simulated (%)	R^2
Calibration	2003	6.6	17.6	0.55
	2004	12.5	15.3	0.51
Validation	2005	11.8	16.1	0.61
	2006	-	-	-
	2007	-	-	-
	2008	-	-	-
Average		10.3	16.3	0.56

Result and Discussion

❖ 3. Chuncheon 2

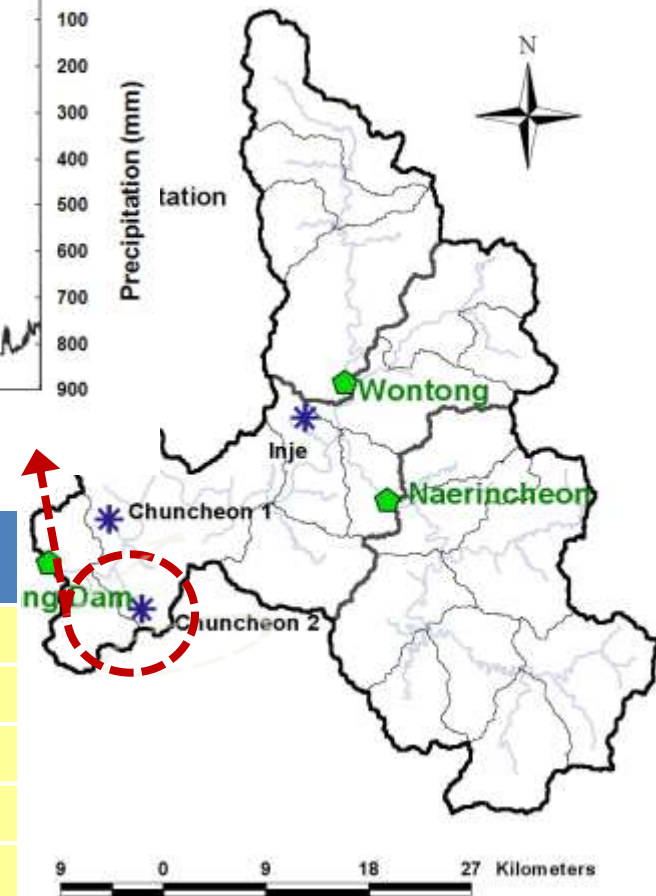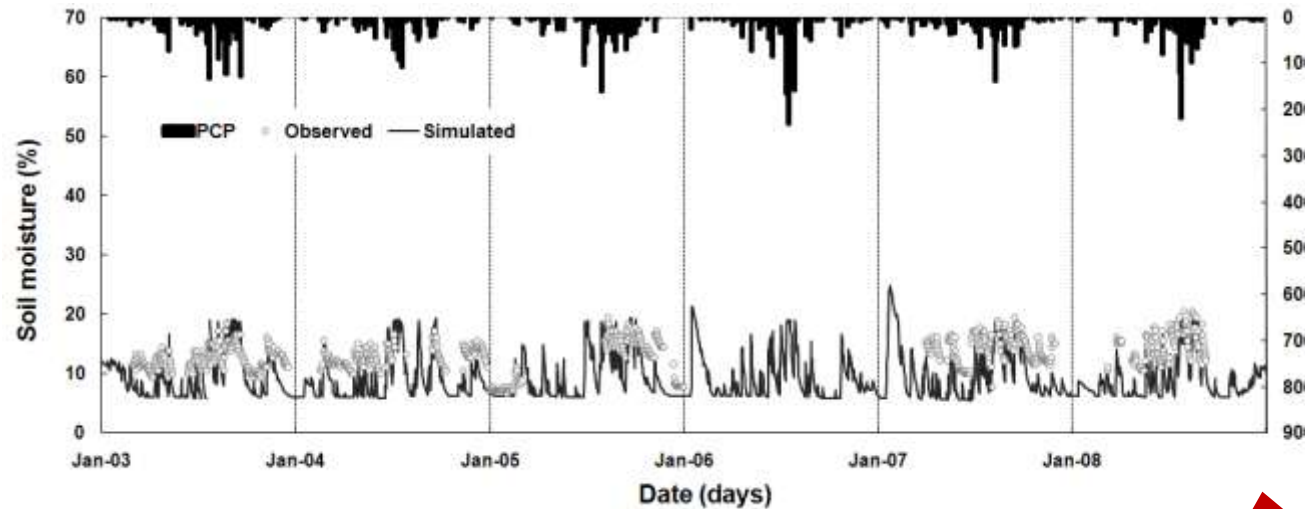

Year		Observed (%)	Simulated (%)	R^2
Calibration	2003	10.6	9.6	0.61
	2004	9.0	9.0	0.56
Validation	2005	7.1	9.4	0.62
	2006	-	-	-
	2007	13.4	10.0	0.65
	2008	8.4	8.9	0.56
Average		9.7	9.4	0.60


Result and Discussion

The Correlation Analysis


Result and Discussion

❖ Between SWAT Soil Moisture and MODIS NDVI


Forest leaf growing period (March – June)

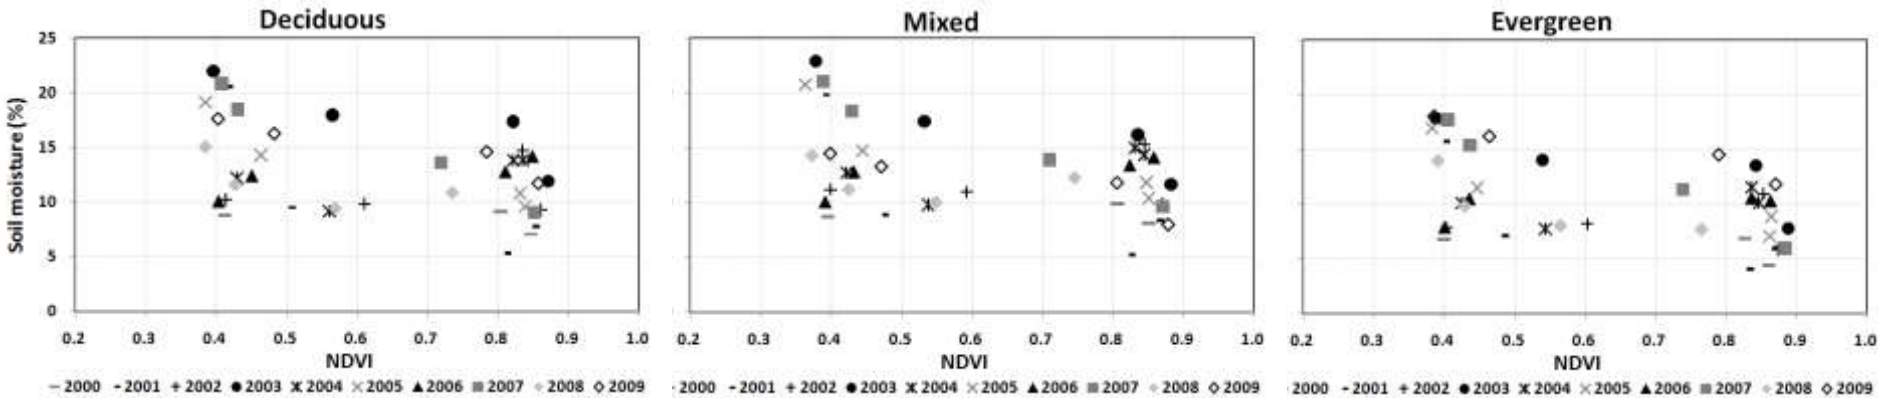

Coefficient of determination

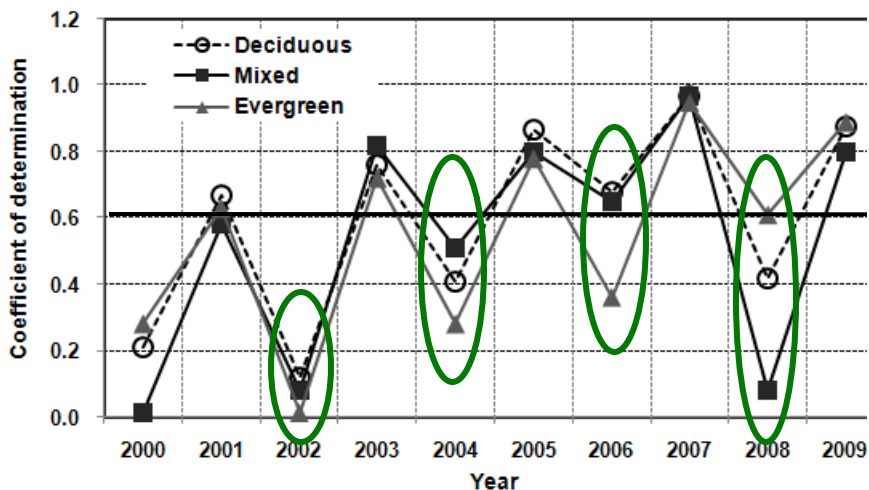


Precipitation, Temperature and Soil moisture Forest leaf Growing period

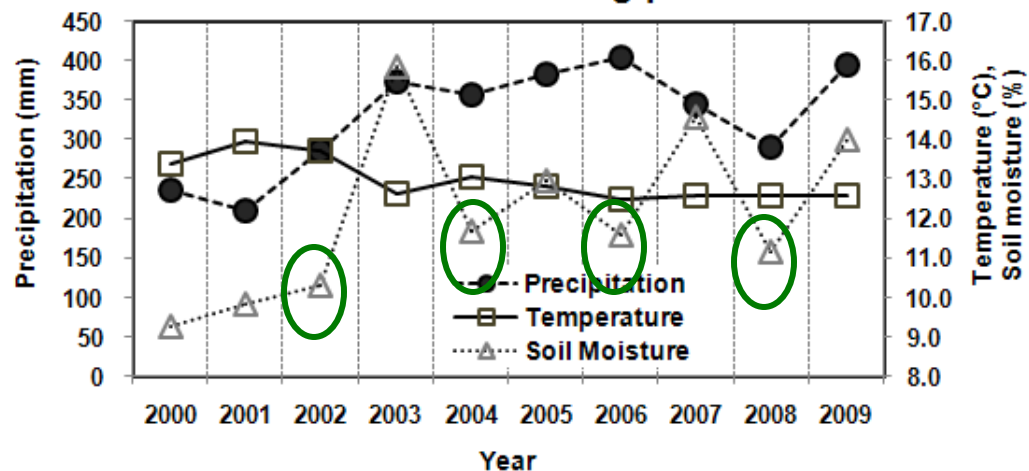


Result and Discussion

❖ Between SWAT Soil Moisture and MODIS NDVI


Forest leaf falling period (September – December)

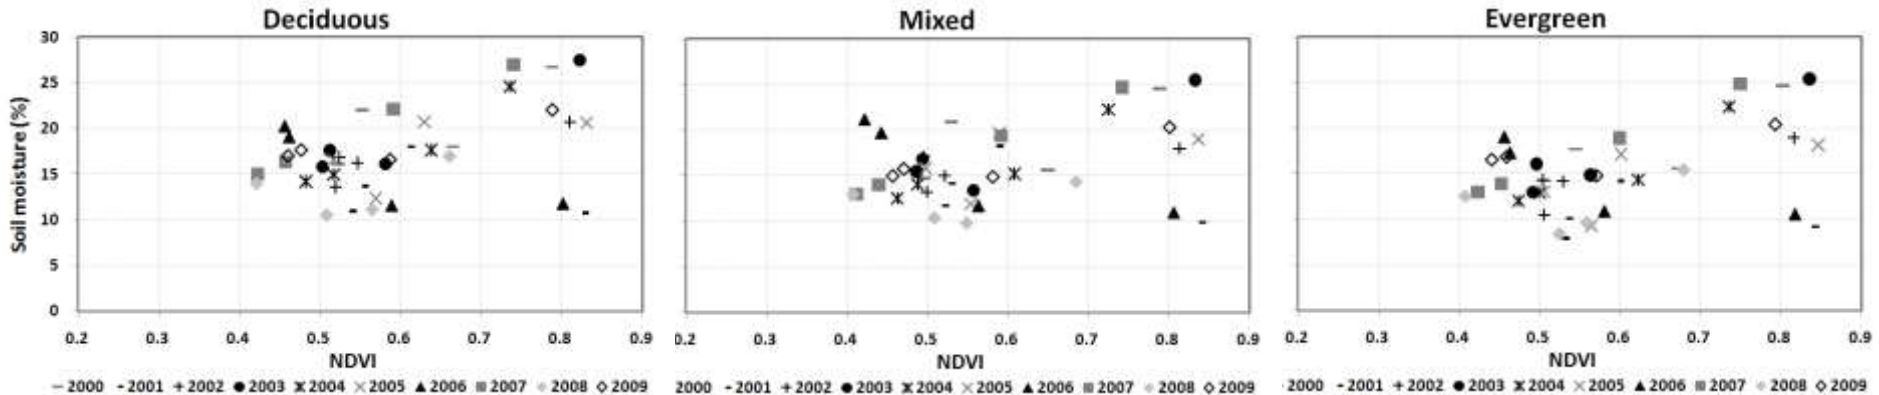

Coefficient of determination

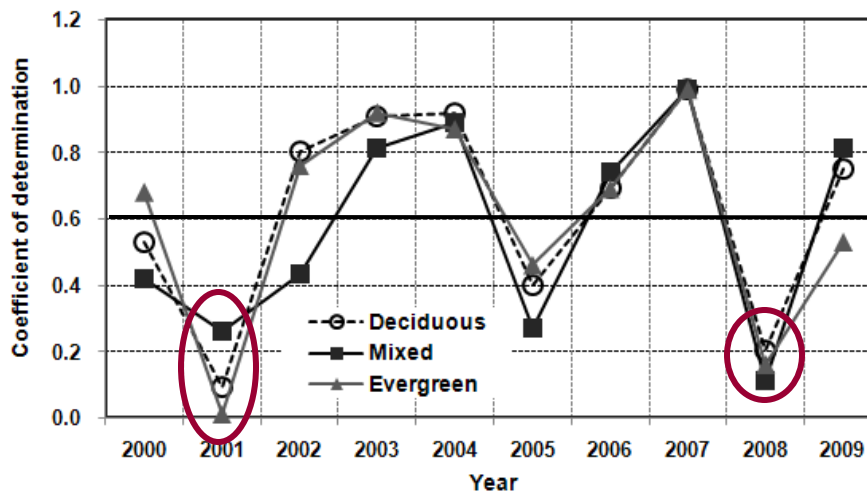


Precipitation, Temperature and Soil moisture Forest leaf falling period

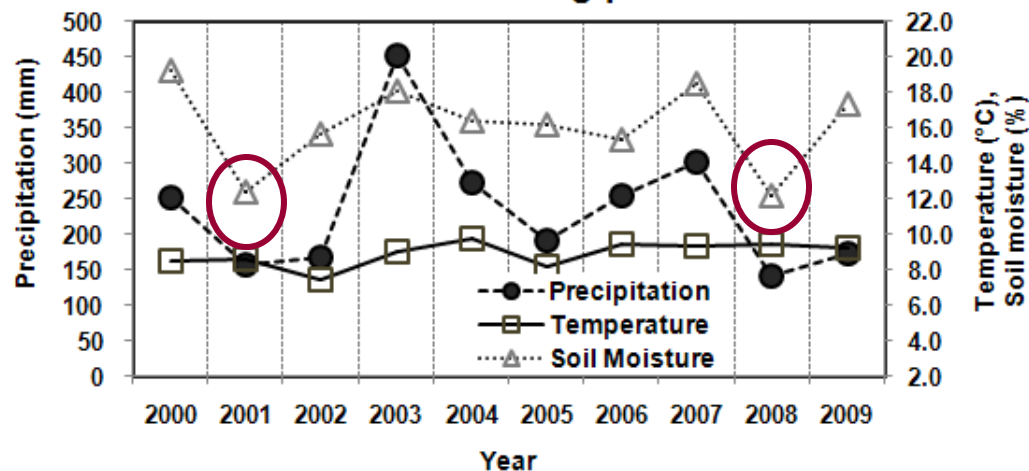


Result and Discussion

❖ Between SWAT Soil Moisture and MODIS LST


Forest leaf growing period (March – June)

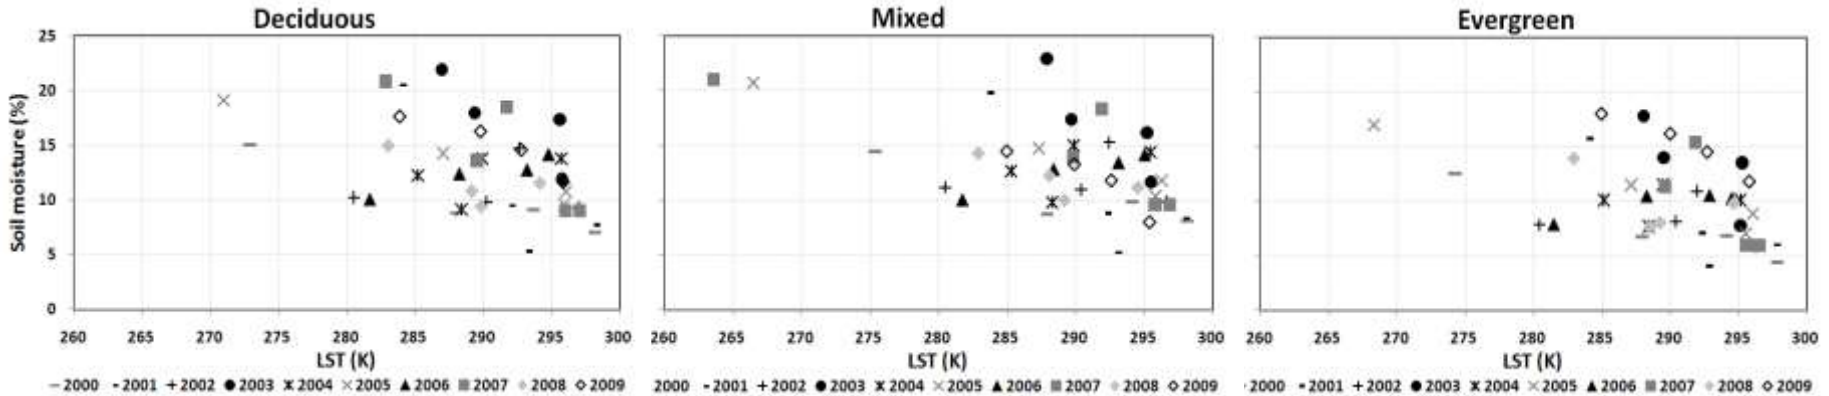

Coefficient of determination

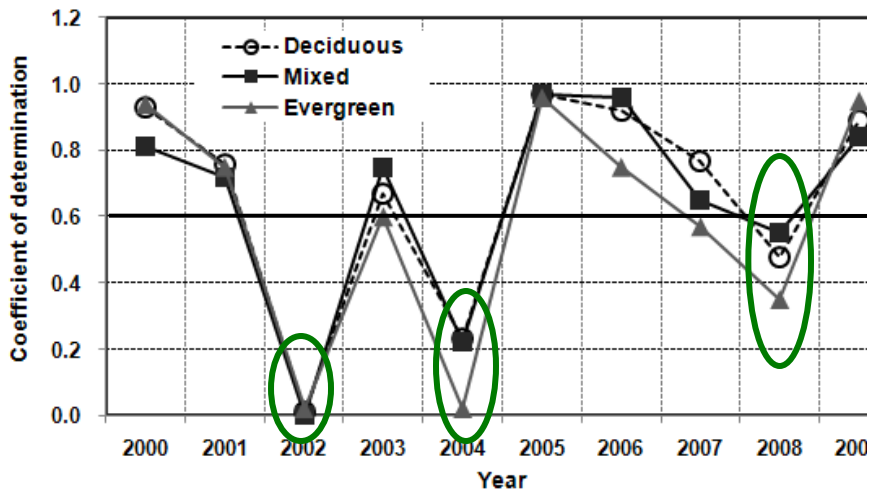

Precipitation, Temperature and Soil moisture Forest leaf Growing period

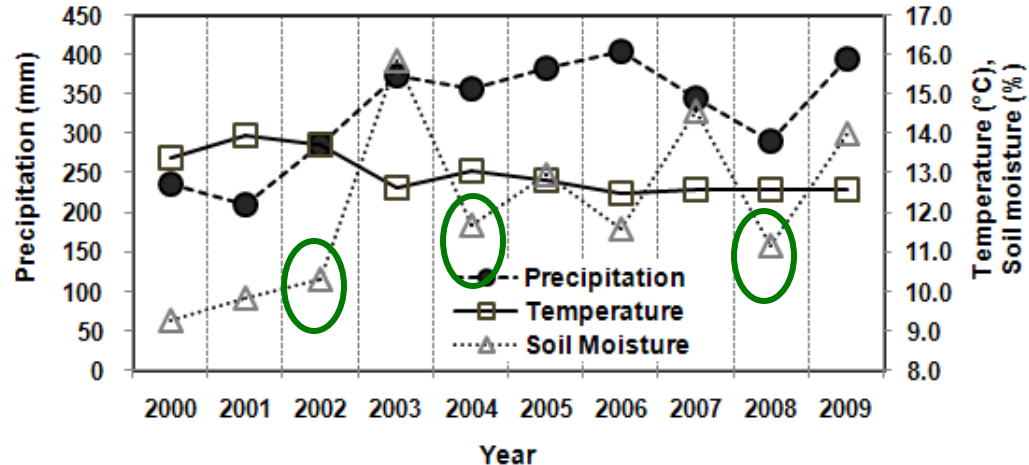

Result and Discussion


❖ Between SWAT Soil Moisture and MODIS LST

Forest leaf falling period (September – December)

Deciduous



Mixed

Evergreen

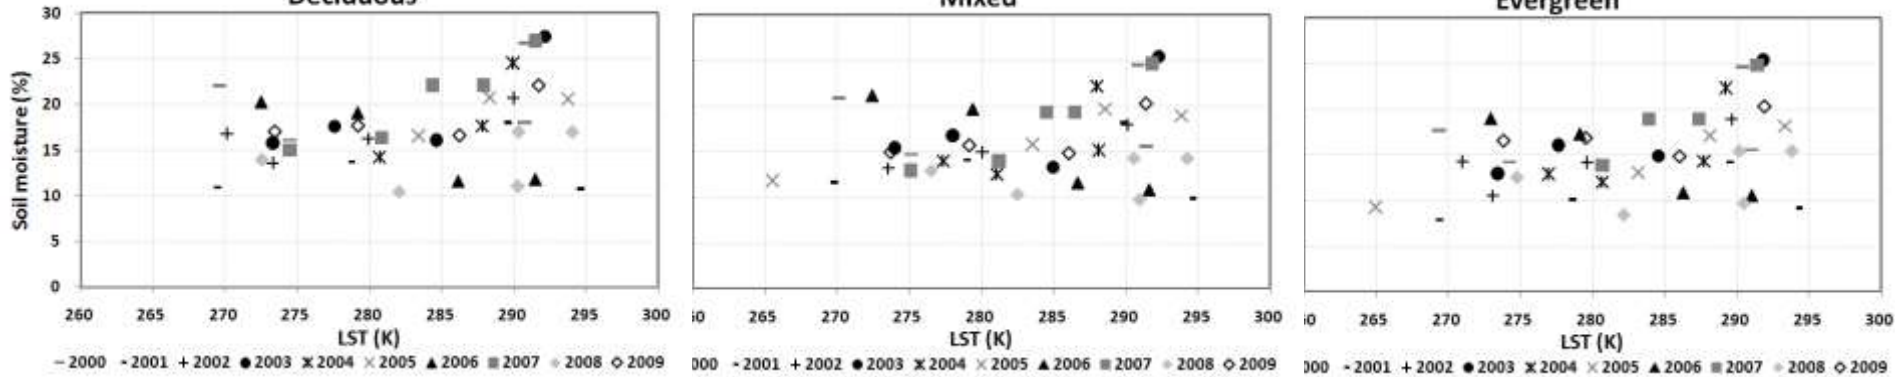

Coefficient of determination

Precipitation, Temperature and Soil moisture Forest leaf falling period

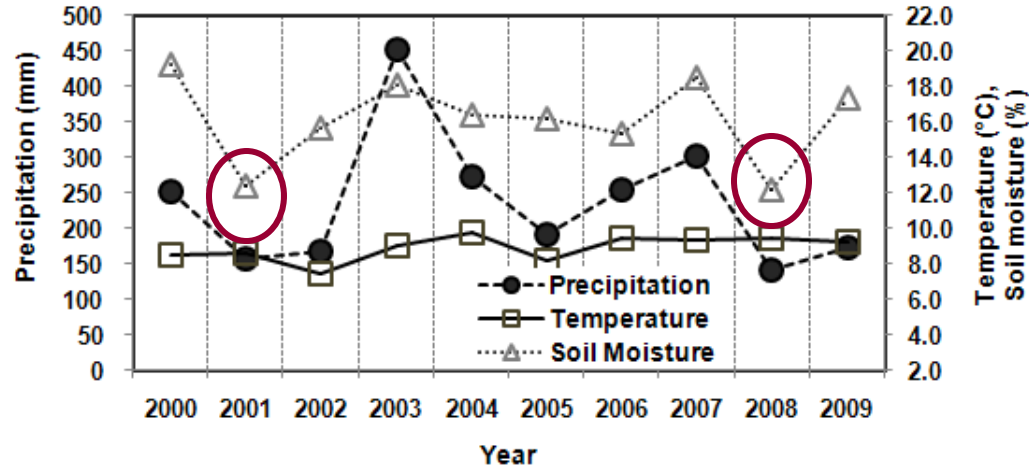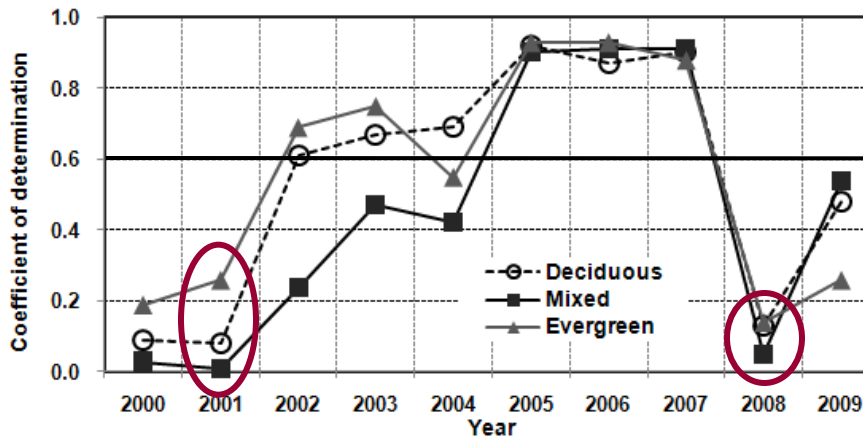

Result and Discussion

❖ *The Comparison of Correlation Analysis*

Period	Case	Rainfall (mm)	Temperature (°C)	R ²		
				Deciduous	Mixed	Evergreen
Forest leaf growing	NDVI	328.4	13.0	0.60	0.53	0.55
	LST			0.66	0.65	0.59
Forest leaf falling	NDVI	247.0	8.9	0.63	0.57	0.62
	LST			0.54	0.45	0.56

➤ Based on period

- ✓ Forest leaf growing period : LST (63 %) > NDVI (56 %)
- ✓ Forest leaf falling period : NDVI (61 %) > LST (52 %)

➤ Based on case

- ✓ NDVI : forest leaf falling period (61 %) > forest leaf growing period (56 %)
- ✓ LST : forest leaf growing period (63 %) > forest leaf falling period (52 %)

Result and Discussion

The Multiple Regression Analysis

Result and Discussion

- ❖ *The multiple regression analysis between SWAT Soil Moisture, and MODIS NDVI and LST*

$$\text{Soil moisture} = a \text{ NDVI} + b \text{ LST} + c$$


➤ Method of assessment

- ✓ Multiple coefficient of correlation
- ✓ Coefficient of determination
- ✓ Adjusted coefficient of determination
- ✓ Standard deviation


Result and Discussion

Forest leaf growing period (March – June)


Multiple coefficient of correlation

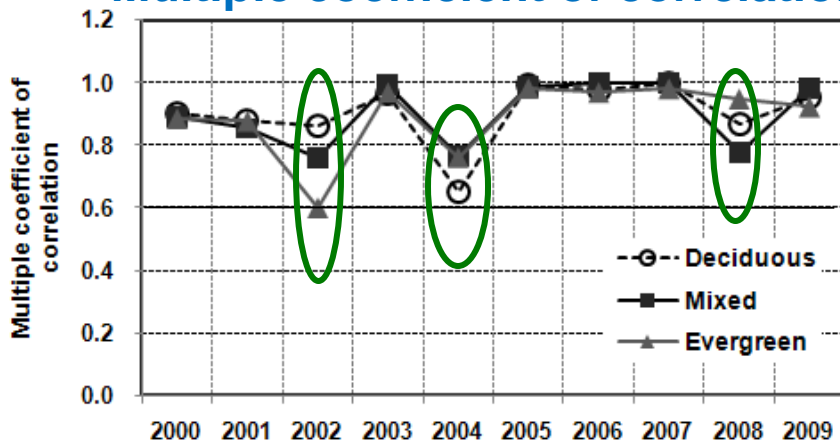


Coefficient of determination

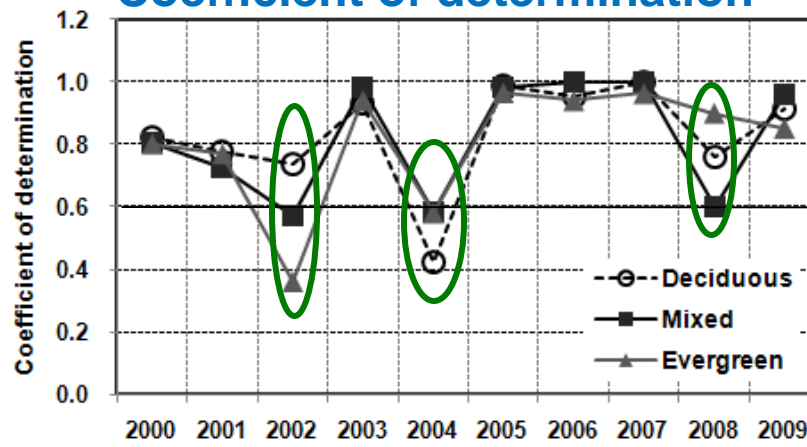

Adjusted coefficient of determination

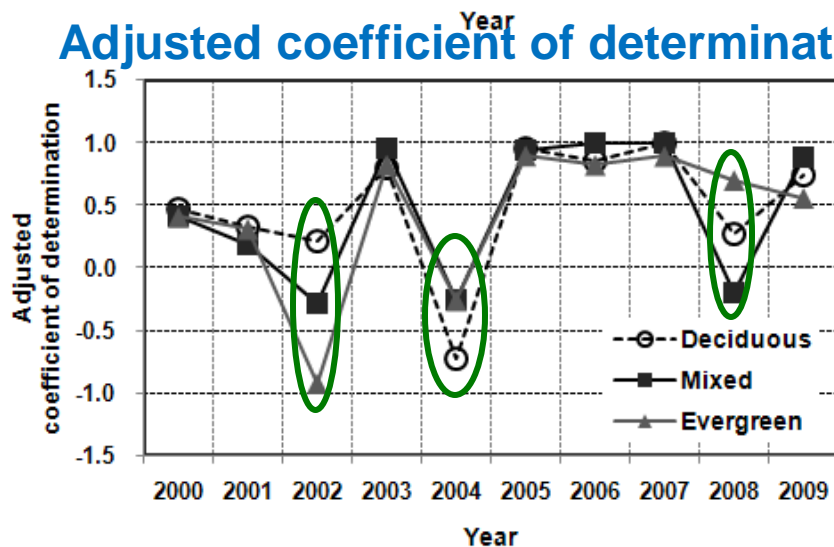


Standard deviation

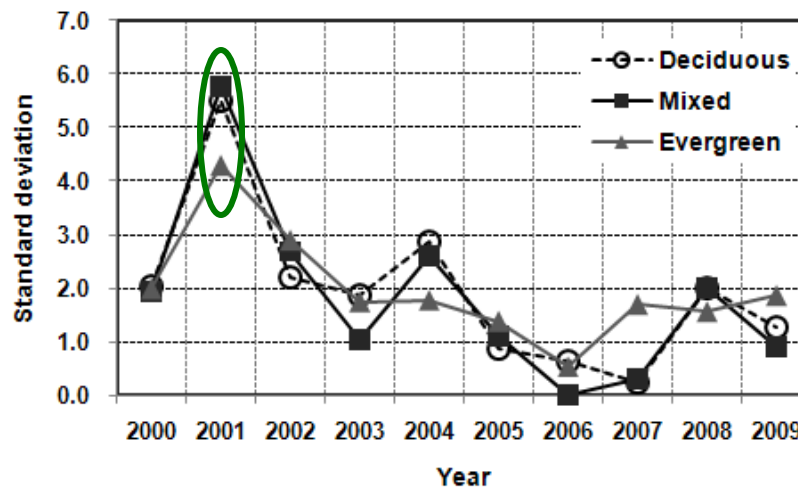


Result and Discussion

Forest leaf falling period (September – December)


Multiple coefficient of correlation

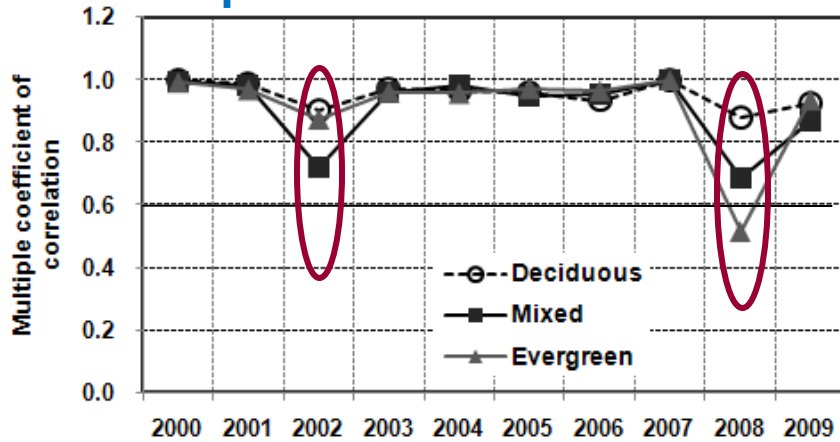


Coefficient of determination

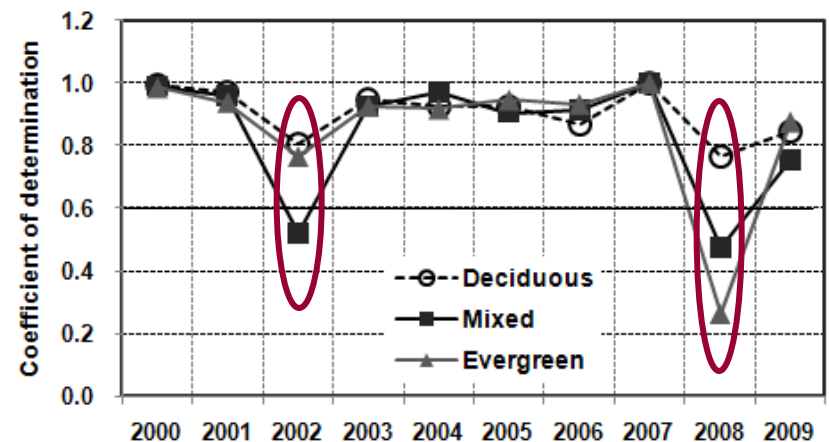

Adjusted coefficient of determination

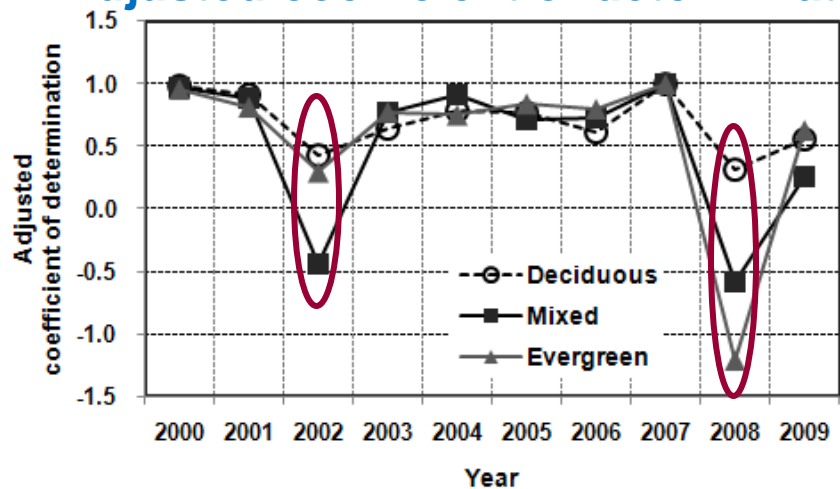

Standard deviation


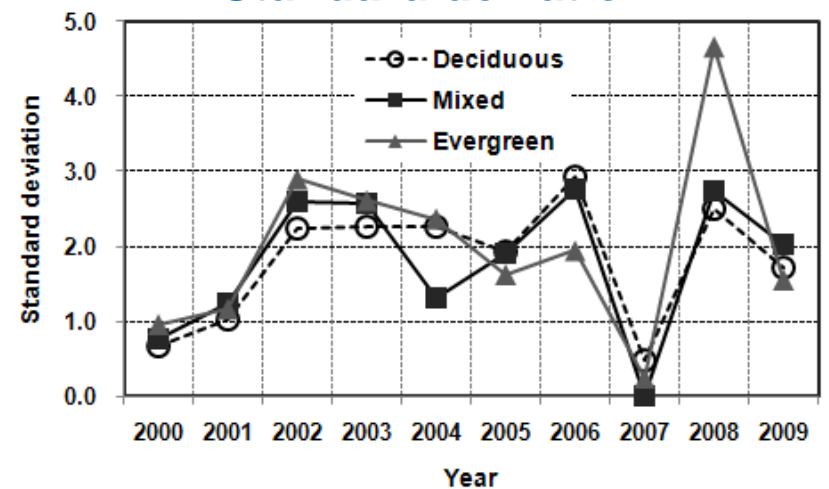


Result and Discussion

❖ Precipitation, Temperature, Soil Moisture, NDVI and LST



Forest leaf growing period (March – June)

Forest leaf Growing period

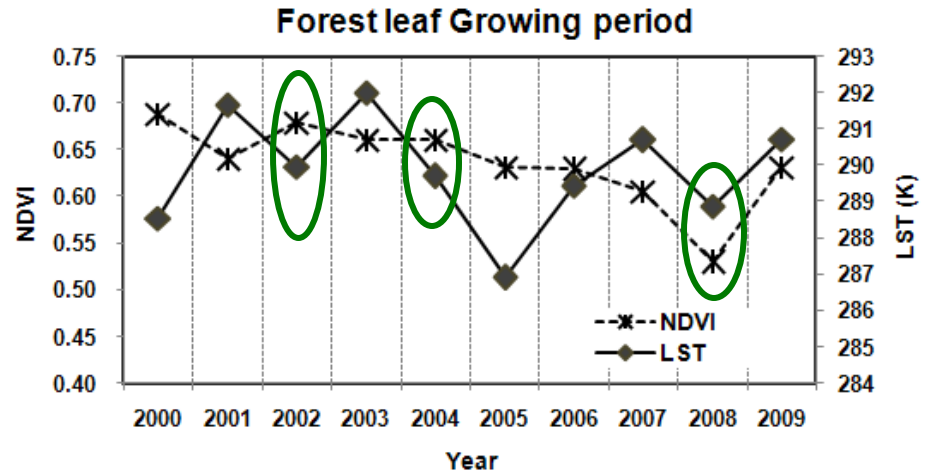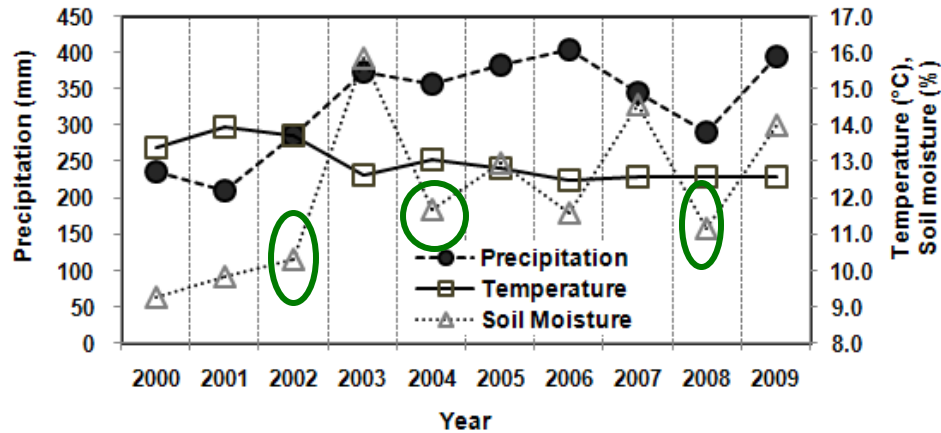

Forest leaf falling period (September – December)

Forest leaf falling period

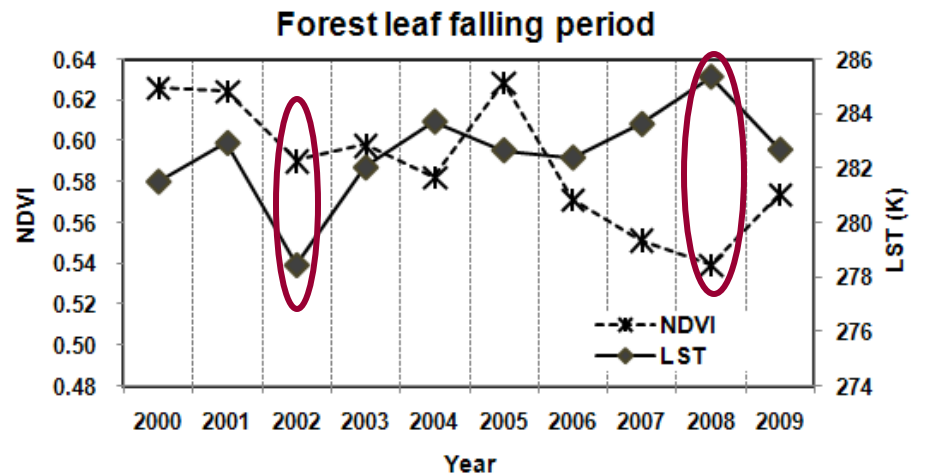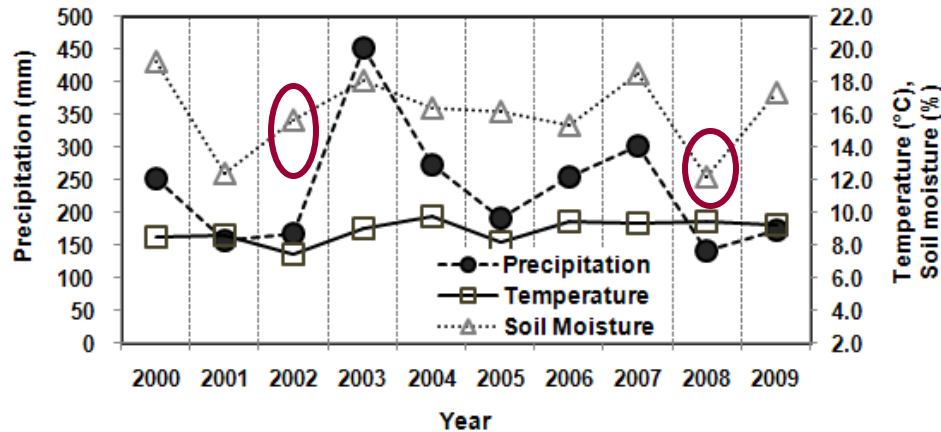

Summary and Conclusions

- ❖ Due to the lack of soil moisture ground data, we need a pseudo indicator of soil moisture condition.
- ❖ This study was tried to investigate the correlations between SWAT simulated soil moisture (SM) and MODIS NDVI and LST how much the NDVI and LST can explain the soil moisture for the forest leaf growing and falling periods respectively.
- ❖ The LST can explain about 7% better than NDVI during **forest leaf growing period**, and NDVI can explain about 9% better than LST during **forest leaf falling period**.
- ❖ The soil moisture can be more described by NDVI and LST together than by just one.
- ❖ Yet, the study result include many uncertainty. So, in future, I will collect continuously MODIS data, and apply the other method.

**Thank you for
your attention!**